


# CLASSICTONE

## High NRC Glass Mineral Wool Acoustic Ceiling Panel

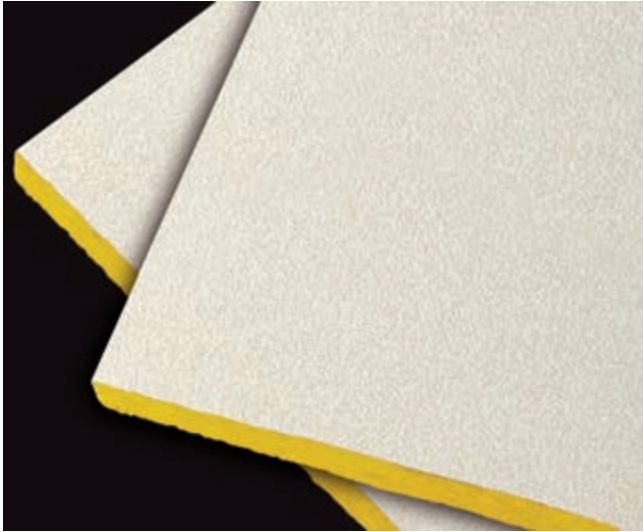

### CLASSICTONE

Built on ECOWOOL technology, CLASSICTONE glass mineral wool acoustic ceiling panel is manufactured from almost 80% of recycled glass cullet. It is an aesthetical and decorative suspended ceiling system, specially designed for selective and distinctive applications, where acoustical (sound) control is crucial and paramount.

### AREAS OF APPLICATION

As decorative, acoustically effective suspended ceilings for indoor use and in covered outside areas that are not exposed to weather such as rain or environmental pollution. CLASSICTONE is installed on an exposed or concealed suspended grid system, creating a ceiling with a smooth appearance. Each acoustic panel is easily demountable.

### VARIATIONS

- Square lay in panels are available bare edges faced with printed glass tissue on the front.
- Square lay in panels are available concealed with printed glass tissue on the front, harden and painted edges and white glass tissue facing on the back.

### DIMENSION

- 603mm x 1212mm / 595mm x 595mm
- 603mm x 603mm / 595mm x 595mm

### THICKNESS

- 15mm (straight edge)
- 20mm (recessed edge)

### SUSTAINABLE PRODUCT

PGF Insulation is committed to providing environmentally sustainable products. CLASSICTONE is free from CFCs, HCFCs and any other material with ozone depletion potential in their manufacture/composition content, and represent no known threat to the environment. Made from nearly 80% recycled glass and locally sourced raw materials, ECOWOOL range of glass mineral wool is perfectly in tune with sustainability and environmental concerns. CLASSICTONE is compliant with most green rating tool ODP Emissions credit requirements. Air quality is maintained with total Volatile Organic Compound (VOC) emissions below quantifiable levels.

### ADVANTAGES

**Mould Growth.** Does not encourage growth of mould, fungus, bacteria or rodents. Tested in accordance with ASTM C1338-08.

**Corrosiveness.** Chemically inert. Will not cause or accelerate corrosion of steel, stainless steel, copper or aluminum due to its specifically inorganic and mineral composition. Tested in accordance with ASTM C665-12.

**Optimal fibre diameter.** Optimal fibre diameter ranging from 4-5 micron produces more air chamber which enables the insulation to provide a better and enhanced performance.

**Better fibre network.** Fine, longer and evenly distributed fibre network helps in creating better tensile strength allowing the insulation to demonstrate superior durability, flexibility and feeling much softer.


**Alkalinity.** pH 9.

**Water Vapor Absorption.** Absorbs less than 5% by weight. Tested in accordance with ASTM C1104.

**Odor Emission.** Does not emit any unpleasant odor. Tested in accordance with ASTM C1304.

### SAG RESISTANCE

Moist indoor air can cause other panels to visibly sag. CLASSICTONE ceiling panel offers very high resistance to moisture absorption which protects them against warping, buckling and sagging. The panels withstand a permanent ambient RH up to 90% at 30 °C without sagging.

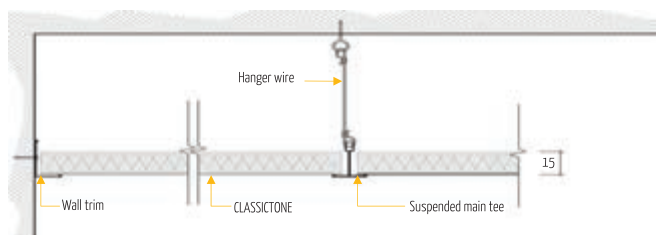

### HYGIENIC PROPERTIES

Made of ECOWOOL glass mineral wool, CLASSICTONE has no nutritional value and therefore it provides no sustenance to harmful micro-organisms.

# CLASSICTONE

High NRC Glass Mineral Wool Acoustic Ceiling Panel



## SURFACE FINISH

Factory painted glass scrim - white  
(other colors available upon request)

## FIRE PROPERTIES

- Tested in accordance with :
- B.S. 476: Part 6 Fire propagation
  - B.S. 476: Part 7 Surface spread of flame
  - BOMBA Class '0'

## THERMAL CONDUCTIVITY

Tested in accordance with ASTM C518 at 20°C mean temperature.  
K-Value : 0.0309 W/mK.

## ACOUSTICAL PERFORMANCE

CLASSICTONE acoustic ceiling panel is amongst the most effective acoustic insulation solutions when noise treatment is required. Tested in accordance with ASTM C423-09a and E795-05.

THK (mm)	Center Frequency (Hz)							
	125	250	500	1000	2000	4000	NRC	SAA
15mm	0.94	0.97	0.68	0.87	1.00	1.05	0.90	0.90
20mm	0.85	0.86	0.76	0.94	1.05	1.15	0.90	0.91

## WARRANTY INFORMATION

10-Year Limited Product Warranty. Please refer to the Acoustic Ceiling Panel Warranty, Installation and Maintenance Information.



## SPECIFICATION

To supply and install CLASSICTONE Acoustic Ceiling Panel with NRC 0.90 manufactured by PGF Insulation c/w exposed grid system with approved 3mm hanger rod, adjustable butterfly clip, main tees, cross tees and necessary fitting and accessories fixing to steel framing or concrete soffit, including forming opening for grilles, light fittings and the like all in accordance to manufacturer's specification.

## INSTALLATION

The installation of CLASSICTONE acoustic panels is part of interior decorating and may only be carried out under controlled humidity and temperature conditions. Installation shall not commence until the building is water tight and dry. Light fittings shall be independently supported, use hold down clips in areas of wind uplift. It is recommended that air grilles be installed in the ceiling to balance air pressure differentials. Please refer to the Acoustic Ceiling Panel Warranty, Installation and Maintenance Information.

## SQUARE LAY IN / DROP IN PANEL

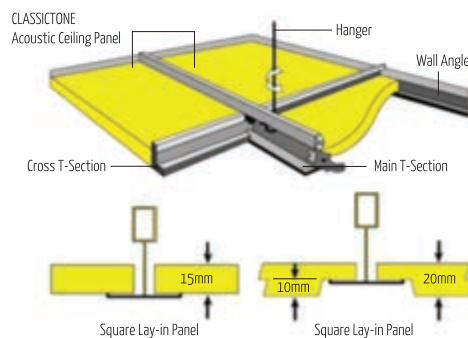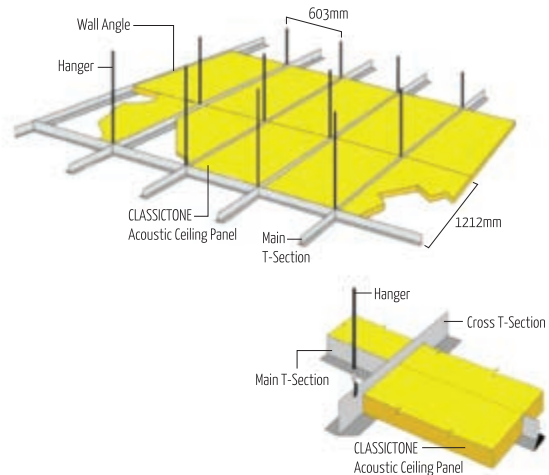

Technical specifications as shown in this literature are intended to be used as general guidelines only. The physical and chemical properties of the glass mineral wool insulation listed herein represent typical average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are listed to change without notice. Any references to numerical flame spread or smoke developed ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions. The suitability of the product is not binding for special individual cases. Warranty and liability upon delivery shall be in accordance with our General Terms and Conditions. No responsibility is assumed for the correctness of this information. Version of 1<sup>st</sup> August 2017.

PGF Insulation Sdn. Bhd. (228905-M)

Headquarters (HQ): 2449, Lorong Perusahaan Sepuluh, Kawasan Perusahaan Perai, 13600 Perai, Penang, Malaysia.  
Tel : +604 390 8460  
Fax : +604 399 6197  
E-mail : sales@ecowool.com.my

KL Office: 46-2, Block D, Zenith Corporate Park, Jln SS7/26, 47301 Petaling Jaya, Selangor D.E., Malaysia.  
Tel : +603 7886 0074  
Fax : +603 7886 0077  
E-mail : sales@ecowool.com.my